


测试接头应用于液压系统的：

1. 压力监测
2. 排气
3. 取样

优点：

1. 可在系统压力下连接
2. 检测仪表可以很方便地连接
3. 可以重复使用无泄漏

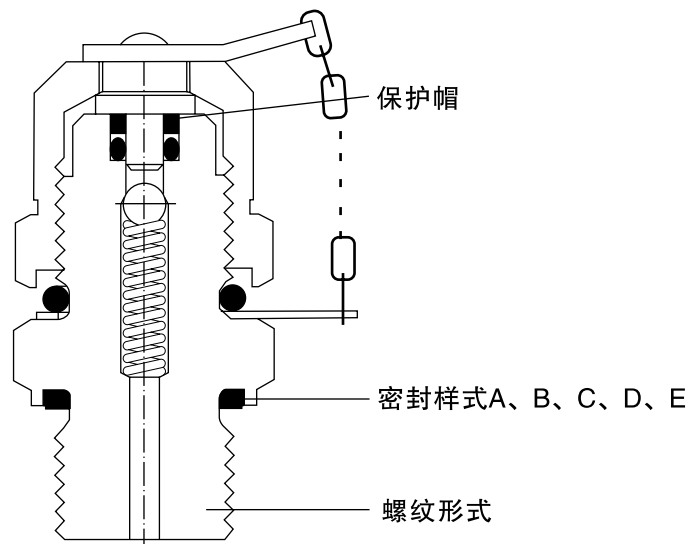


材料：

1. 金属部分：碳钢，不锈钢请垂询
2. 密封件：NBR（丁腈橡胶）-20℃至+90℃，FPM（氟橡胶）-20℃至+200℃

A式				B式					C式					D式			E式					
G	d1	t1	t2	G	d1	t1	t2	a	G	d1	t1	t2	a	G	t1	t2	G	d1	d2	t1	t2	a
M8 × 1	9.5+0.1	11	15.5	M10 × 1	15	8	13.5	1.5	M12 × 1.5	18	12	18.5	1	R1/8K	5.5	9.5	5/16-24UNF	9.1	17	10	12	1.9
M10 × 1	11.5+0.1	12	16.5	M12 × 1.5	18	12	18.5	1.5	M14 × 1.5	20	14	20	1	R1/4K	8.5	13.5	7/16-20UNF	12.4	21	11.5	14	2.4
M14 × 1.5	20+0.2	12	18.5	M14 × 1.5	20	12	18.5	1.5	G1/8	15	8	13	1	1/8NPT	9	13.5	1/2-20UNF	14	23	11.5	14	2.4
				M16 × 1.5	22	12	18.5	1.5	G1/4	19	14	20	1	1/4NPT	12	18.5	9/16-18UNF	15.6	25	12.7	15.5	2.5
				G1/8	15	10	16.5	1.5	G3/8	23	16	20	1	3/8NPT	15	20						
				G1/4	19	12	18.5	1.5														
				G3/8	23	12	18.5	1.5														

常用测试接头订货标记

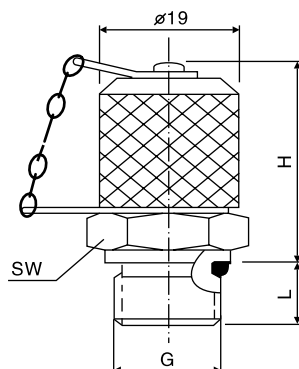

G	H	L	密封型式	SW	PN	订货标记
M8 × 1	36	8	A	17	250	IC21.10.61
M10 × 1	36	8	A	17	400	IC21.10.62
	38	10	C	17	400	IC21.10.47
M12 × 1.5	36	12	B	17	630	IC21.10.69
	38	10	C	17	630	IC21.10.56
M14 × 1.5	36	12	B	19	630	IC21.10.70
	36	12	C	19	630	IC21.10.76
M16 × 1.5	38	10	C	22	630	IC21.10.77
	36	12	B	22	630	IC21.10.71
G1/8	36	8	B	17	400	IC21.10.55
	36	8	A	17	400	IC21.10.64
	36	8.5	C	17	400	IC21.10.73
G1/4	36	10	A	19	630	IC21.10.85
	36	12	C	19	630	IC21.10.66
	36	12	B	19	630	IC21.10.60
G3/8	36	14	C	22	630	IC21.10.58
	36	14	B	24	630	IC21.10.50
G1/2	36	14	C	27	630	IC21.10.12
	36	14	B	27	630	IC21.10.13
R1/8K	34	8	D	17	400	IC21.10.63
R1/4K	34	12	D	17	630	IC21.10.65
R3/8K	34	16	D	22	630	IC21.10.49
1/8NPT	34	9.5	D	17	400	IC21.10.68
1/4NPT	34	14	D	17	630	IC21.10.59
3/8NPT	34	16	D	22	630	IC21.10.48
5/16-24UNF	38	9.5	E	17	250	IC21.10.74
7/16-20UNF	38	10	E	17	630	IC21.10.67
9/16-18UNF	38	10	E	19	630	IC21.10.72
1/2-20UNF	38	10	E	17	630	IC21.10.75

标准供货NBR(丁腈橡胶)密封, 如需FPM(氟橡胶), 请在订货标记后加“F”